

# INDUCTION HOB

## KI 6560.0SR

### K-SERIES. 5

- 10-level power controls "glideControl" (power booster setting incl.) with red display
- 1 automatic cooking function: keeping warm
- Switch-off memory
- Bridge function, front and rear cooking zone can be switched together to one cooking zone
- Automatic booster cooking phase
- Residual heat indicator
- Minute minder with switch-off feature
- Central switch-off control
- Holiday shut-down device (limiting operation duration time)
- 4 cooking zones 210 x 190 mm / 2,100 W (3,000 W\*)  
\*with power booster setting

Küppersbusch

FÜR KÜCHEN MIT STIL



Frameless



#### Technical data:


- Electrical connection 7.4 kW
- Appliance dimensions W x D approx. 598 x 518 mm  
Installation depth 54 mm
- Niche dimensions W x D approx. 560 x 490 mm  
(for flush installation please refer to the building-in diagrams)

#### Optional accessories:

- Stainless steel profiles Acc. no. ZK 0600
- FlexiGrill Acc. no. 1303
- VarioLine metallic joining strip Acc. no. 1130  
(only possible with stainless steel profiles)

Country of origin: France

KI 6560.0 SR black, frameless

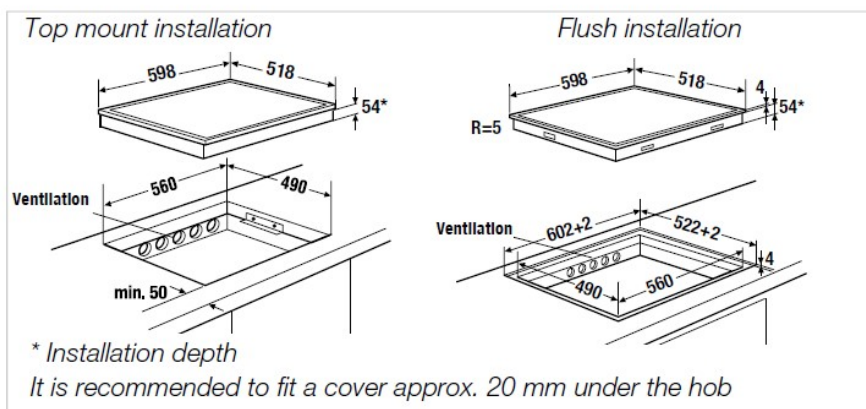

信興電工工程有限公司

Shun Hing Electric Works & Engineering Co., Ltd.