

INDUCTION HOB

KI 8560.0SR

Features:

- 12-level power controls "glideControl" with red display
- 1 pre-defined special level: keeping-warm level approx. 70°C
- Switch-off memory
- Bridge function, front and rear cooking zone can be switched together to one cooking zone
- Automatic booster cooking phase
- Residual heat indicator
- Minute minder with switch-off feature
- Central switch-off control
- Holiday shut-down device (limiting operation duration time)
- 4 cooking zones 210 x 190 mm / 2,100 W (3,000 W*)
*with power booster setting

Technical data:

- Electrical connection 7.4 kW
- Appliance dimensions
Stainless steel frame W x D approx. 800 x 520 mm
Frameless W x D approx. 798 x 518 mm
Installation depth 54 mm
- Niche dimensions W x D approx. 750 x 490 mm
- For more information see page 203

Optional accessories:

- Stainless steel profiles Acc. no. ZK 0800
- FlexiGrill Acc. no. 1303
- Varioline metallic joining strip Acc. no. 1130
(only possible with stainless steel profiles)
- For further optional accessories see page 129


*only possible with optimal accessory ZK 0800

Country of origin: France

Küppersbusch

FÜR KÜCHEN MIT STIL

K-SERIES.5

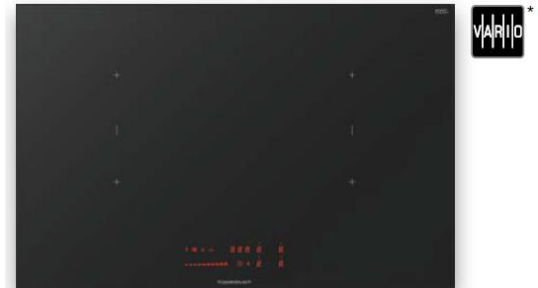

Frameless

glideControl. 12 power levels. 4 cooking zones.



KI 8560.0 SR black, frameless

